


Specification:

Example: LED-6099A220UNV740T3-XSPE3R

Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Option		Finish	Starting Temp
						Accessories	Mounting		
LED-6099A	220=220W 307=307W	UNV=120-277V	7=70+	40=4000 K 50=5000 K	T3=Type III T4=Type IV T5=Type V	XS=10kv Surge OS=Occupancy Sensor PE=Photocontrol 3R=3-pin Receptacle 5R=5-pin Receptacle 7R=7-pin Receptacle	PM=Pole Mount SF=Slip Fitter U=U Bracket	BZ=Bronze	-40°C

Dimension:

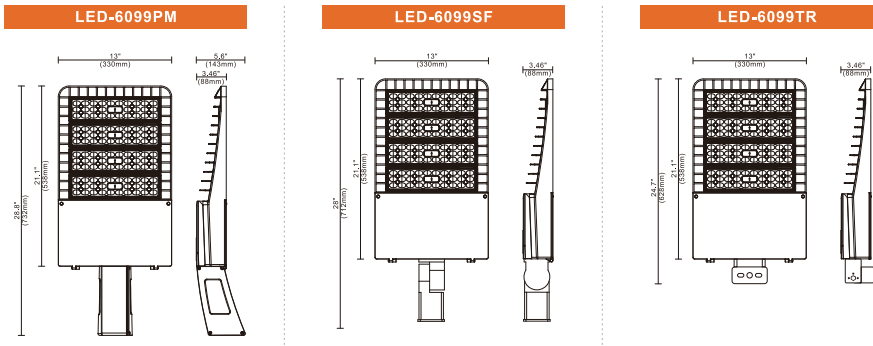

EPA (Effective Projected Area):

Configuration						
	1	2@180°	2@90°	3@90°	3@120°	4@90°
EPA(Sq. Ft.)	0.55	1.10	0.95	1.50	1.74	1.74
Weight(Lbs.)	8.50	17.00	17.00	25.50	25.50	34.00

Performance Data

LED-6099	System Watts	Dist. Type	Lumens	Lpw	B	U	G
	220W	Type III	30299 lm**	138 lm/W	4	2	5
		Type IV	30391 lm**	138 lm/W	4	2	3
		Type V	31130 lm**	142 lm/W	5	2	2
	307W	Type III	37042 lm**	121 lm/W	4	2	5
		Type IV	37808 lm**	123 lm/W	4	2	3
		Type V	38080 lm**	124 lm/W	5	2	2