


Product Description:

Included Quick Mount Plate for easy and contractor friendly installation

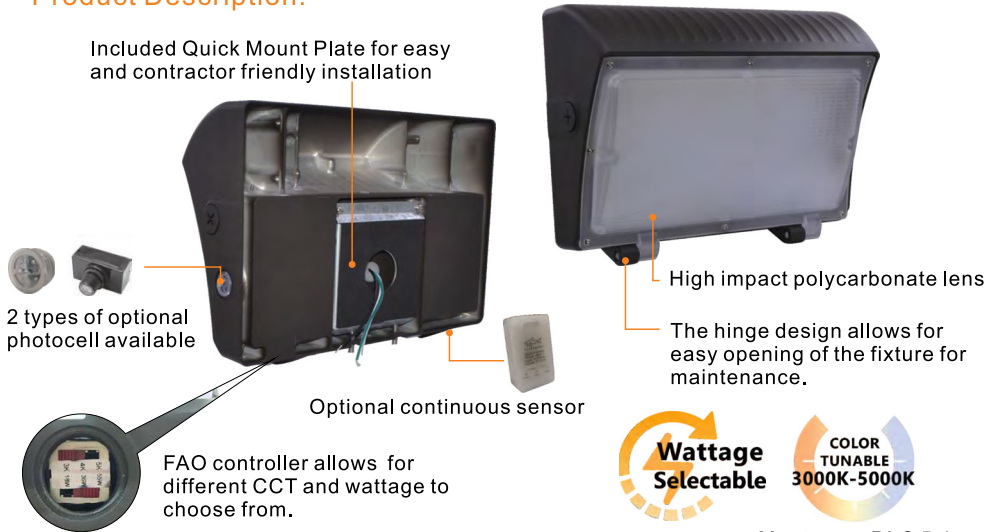

Product Description:

Utilizing the latest generation of LED Chips and a patented smart controller, this uniquely designed wall pack not only delivers a similar light output of a 150/200W metal halide, but it also has multiple wattage and CCT to choose from based on different environments. Housing made out of die-cast aluminum with reliable powder coating specifically for harsh outdoor environment. It is attractive in appearance and performance.

Optional Kelvin color* with adder.

Features:

- LISTING**
UL and CUL listed for wet locations
- HOUSING**
Die-cast aluminum body
- FINISH**
UV stabilized powder coated finish
- LENS**
High impact polycarbonate lens
- OPTIONS**
Finish - Bronze. Color option with adder
Optional Photocontrol
Optional continuous sensor

Performance Data

Model NO.	Nominal Watts**	Lumens**	Efficacy**
LED-6290	16/30/42/46W	6520 lm*	138 lm/W*
	21/41/61/71W	9886 lm*	138 lm/W*
	32/62/92/100W	14075 lm*	138 lm/W*

* Lumen and Efficacy shows the highest wattage at 5000K

Specification:

Example: LED-6290

Model No.	Nominal Watts**	Input Voltage	CRI	Color* Temp	Option	Finish	Starting Temp
LED-6290	046=46W 071=71W 100=100W	UNV=120-277V	8=80+	TK=5000 K /4000K /3000K	XS= 10kV Surge 2S= 20kV Surge PC = Photocontrol OS = Occupancy Sensor	Bronze	-40°C ~ +40°C

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.